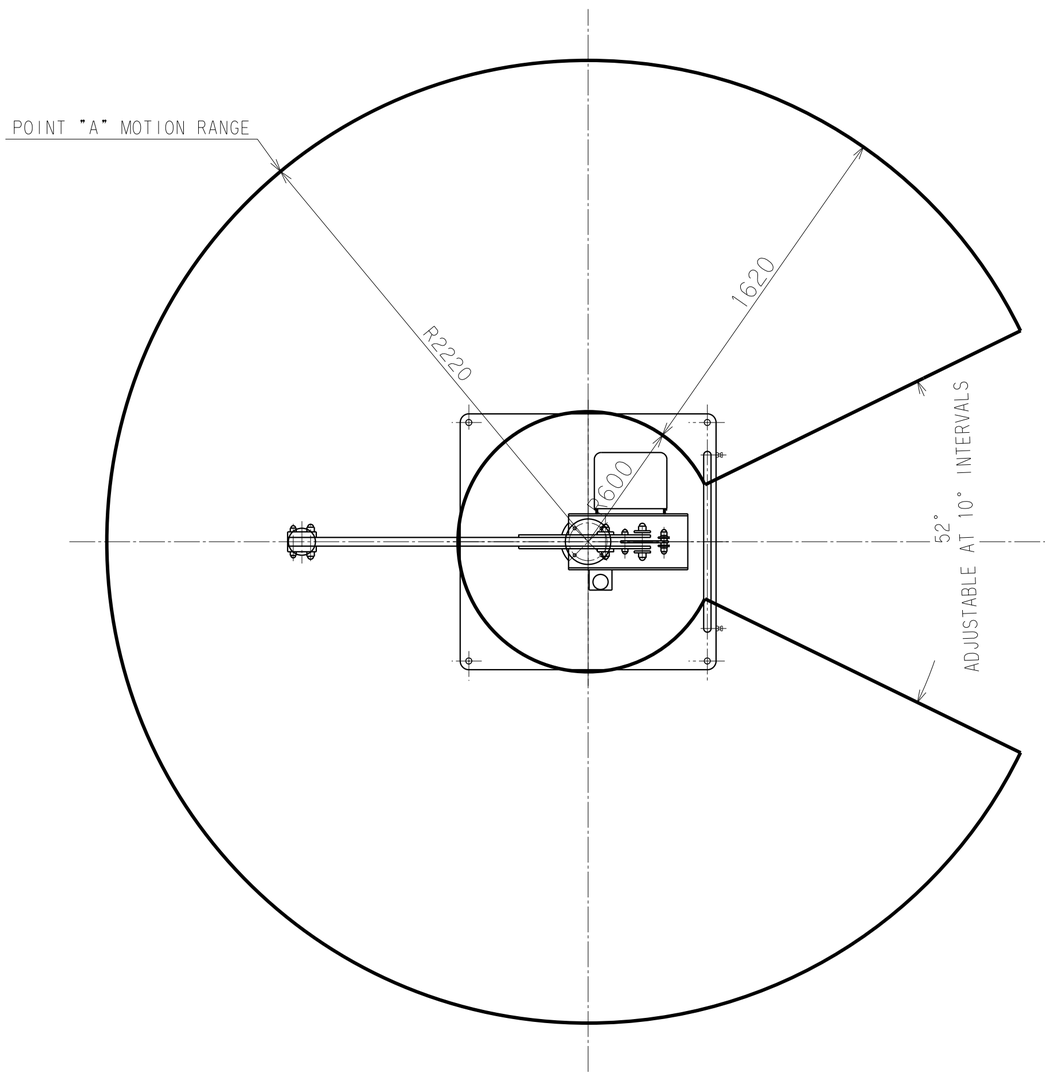


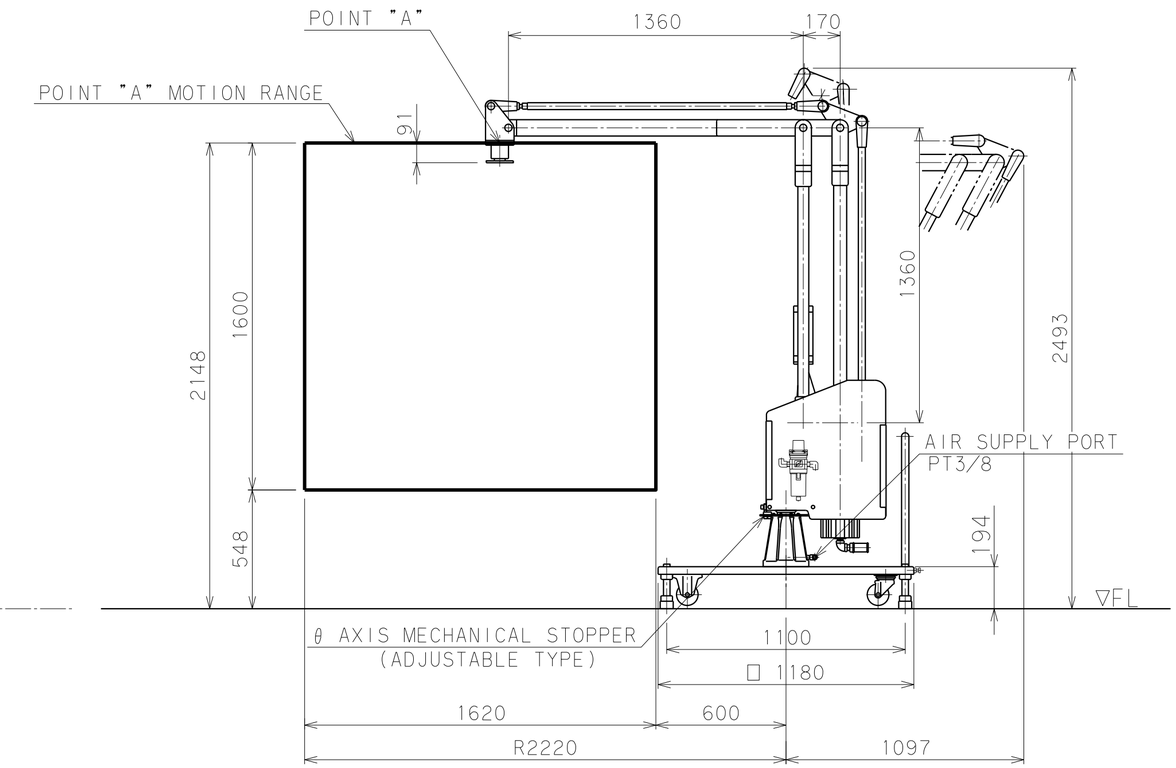


| BALAMAN SPECIFICATIONS | |
|---|---|
| MODEL | BMG-75W<br>θ AXIS MECHANICAL STOPPER<br>(ADJUSTABLE TYPE) |
| MAX.LOAD | 75kg |
| MAX.RADIUS | R2220 mm |
| HORIZONTAL STROKE | 1620 mm |
| VERTICAL STROKE | 1600 mm |
| MAX.WORKING HEIGHT | 2148 mm |
| MAX.MACHINE HEIGHT | 2493 mm |
| CONTROL METHOD | |
| AIR SUPPLY | 0.49 MPaG |
| AIR CONSUMPTION | 122NL/min<br>(10 SEC CYCLE) |
| COATING | MAIN BODY & BASE<br>5.5PB4.7/9.4<br>(MUNSELL NO.)<br>END-EFFECTOR<br>10R5.5/14.5<br>(MUNSELL No.) |
| MAIN UNIT MASS | Approx.220kg |
| BASE MASS | Approx.400kg |
| REMARKS<br>PRESSURE REDUCE SET | |