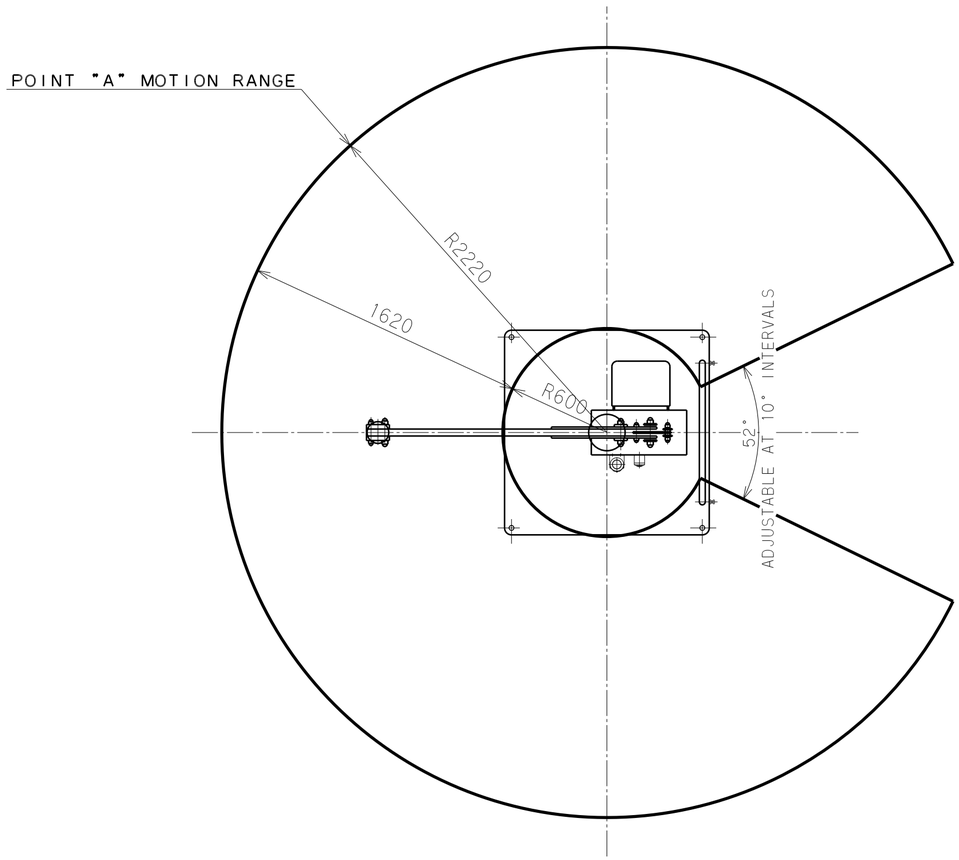


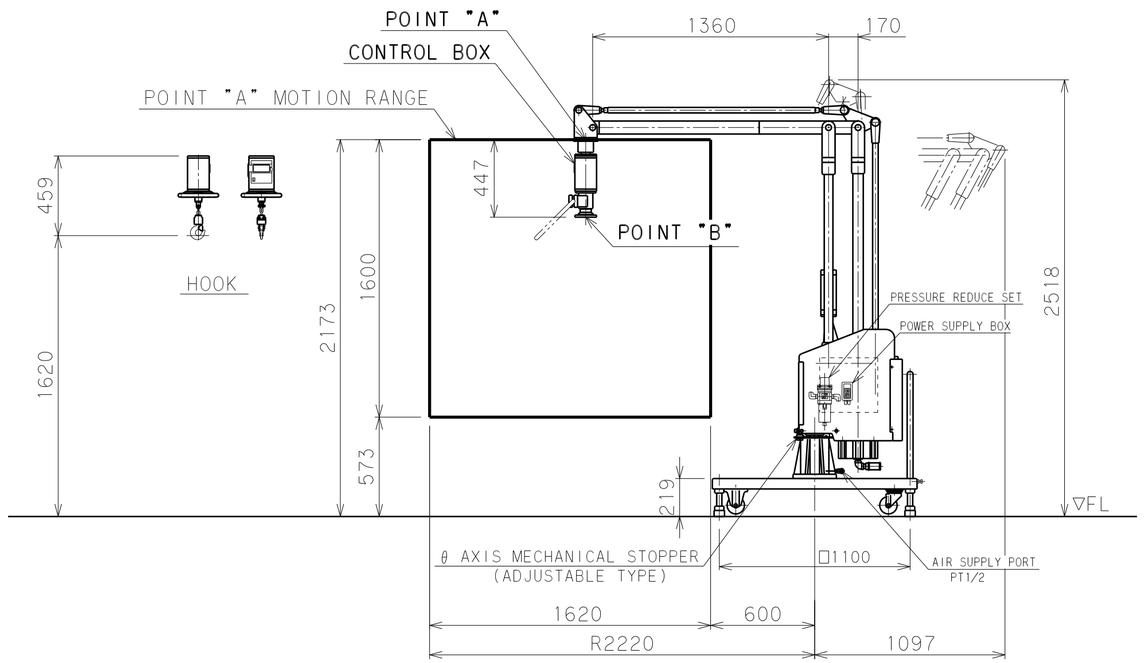


| BALAMAN SPECIFICATIONS | |
|---|---|
| MODEL | U2BMG-150W<br>θ AXIS MECHANICAL STOPPER<br>(ADJUSTABLE TYPE) |
| MAX.LOAD | 150kg(BELOW POINT "A")<br>133kg(BELOW POINT "B") |
| MAX.RADIUS | R2220 mm |
| HORIZONTAL STROKE | 1620 mm |
| VERTICAL STROKE | 1600 mm |
| MAX.WORKING HEIGHT | 2173 mm |
| MAX.MACHINE HEIGHT | 2518 mm |
| AIR SUPPLY | 0.54 MPaG |
| AIR CONSUMPTION | 191L/min<br>(10 SEC CYCLE) |
| POWER SUPPLY | SINGLE-PHASE AC85~AC264V<br>50/60Hz 0.1KVA |
| CONTROL METHOD | |
| COATING | LN-15(JPMA BLACK)<br>LN-93(JPMA WHITE) |
| MAIN UNIT MASS | APPROX. 290kg |
| BASE UNIT MASS | APPROX. 670kg |
| SWIVEL UNIT MASS | 5kg |
| CONTROL BOX MASS | 12kg |
| WORK PIECE MASS | kg |

REMARKS
ACCESSORIES:PRESSURE REDUCE SET
:POWER SUPPLY BOX